

**Gebrüder Meiser GmbH**

Edmund Meiser Straße 1  
D-66839 Schmelz-Limbach

Tel: +49 (0) 68 87/3 09-0  
Fax: +49 (0) 68 87/3 09-3000  
E-Mail: [info@meiser.de](mailto:info@meiser.de)


**Meiser Vogtland GmbH & Co. KG**

Am Lehmteich 3  
D-08606 Oelsnitz

Tel: +49 (0) 37 421/50-0  
Fax: +49 (0) 37 421/50 2120  
E-Mail: [info@meiser.de](mailto:info@meiser.de)

[www.meiser.de](http://www.meiser.de)

---

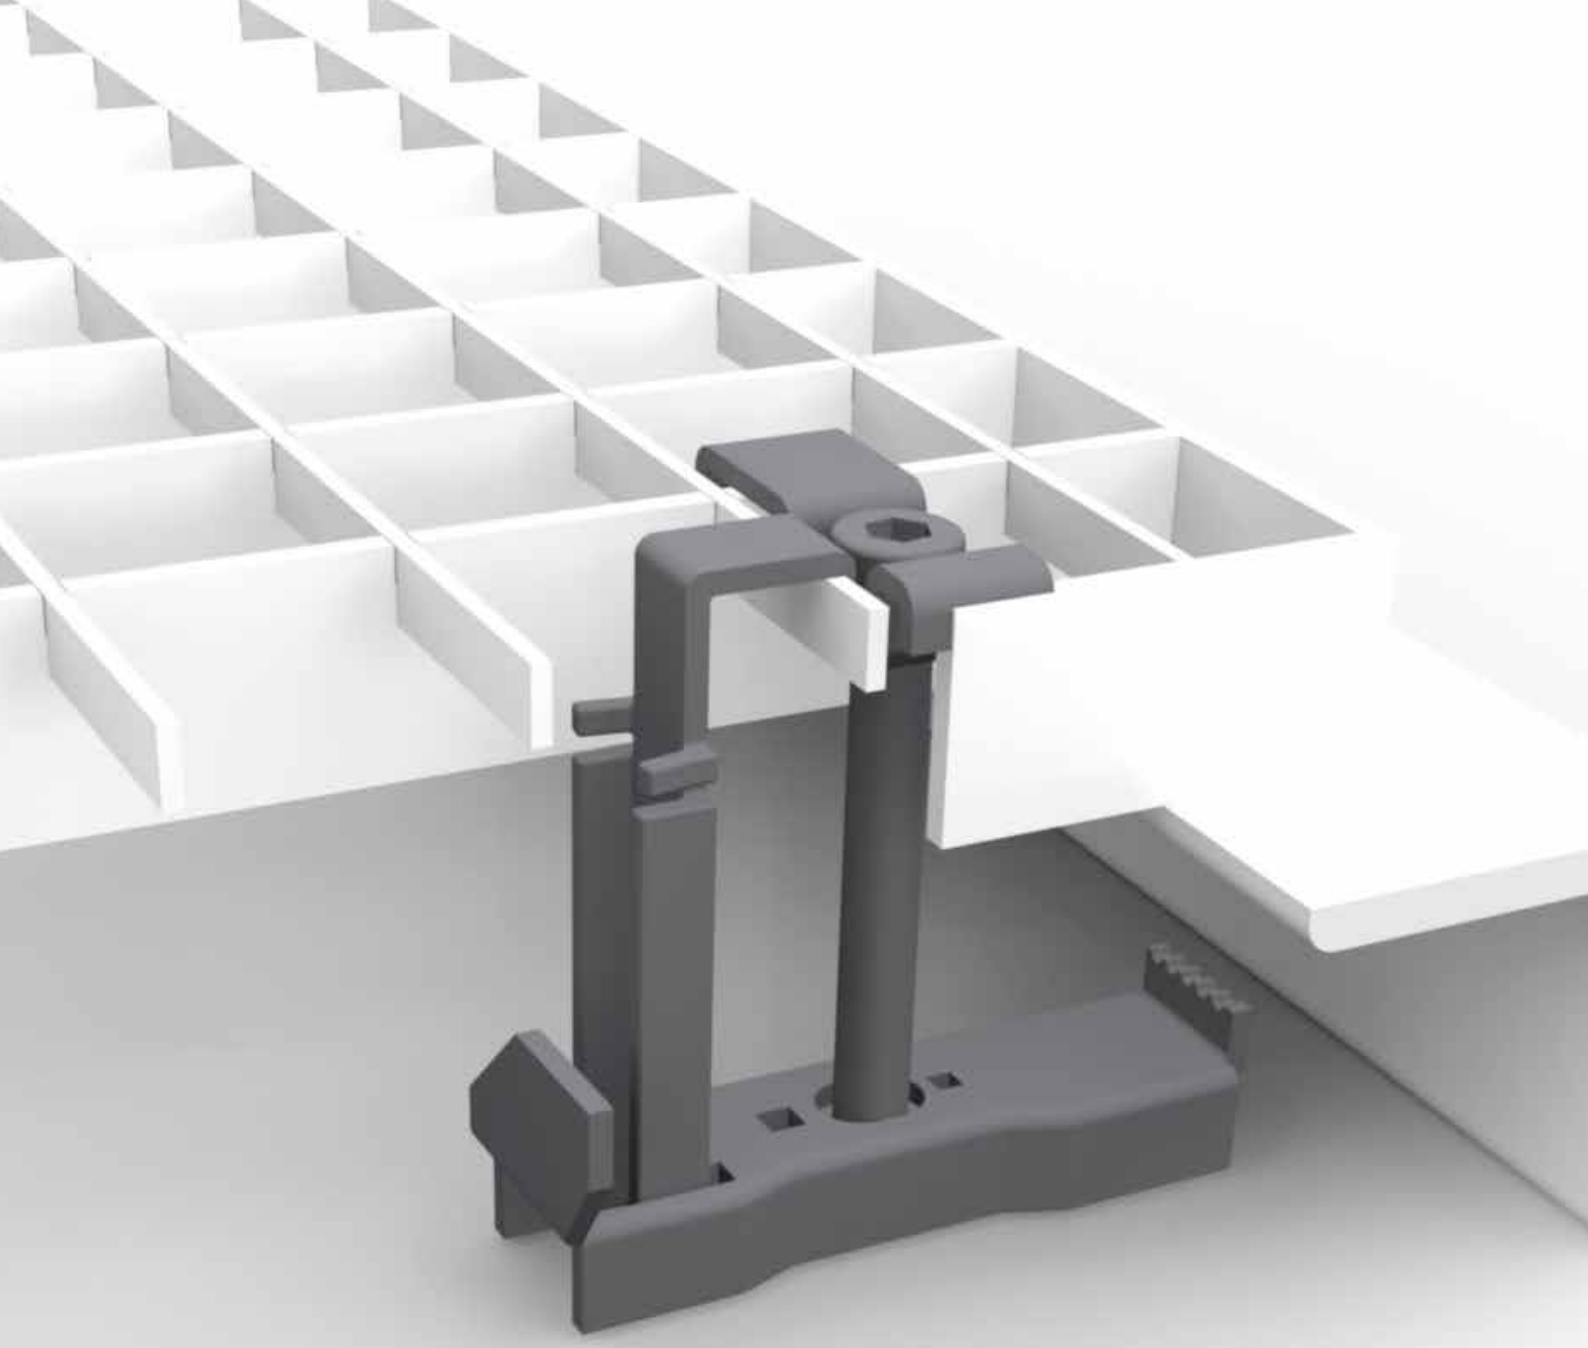

## MEISER Grating Fastening

Developed together with  
the fastening specialist HILTI


---

**MEISER**



Benefits of the MEISER-HILTI grating clamp

- Easy installation from the top of the grating, removing the need for expensive access equipment from below
- **Integrated system:** Clamps are supplied pre-assembled as one unit, no loose parts to worry about
- **High security aspect:** No loose parts on the construction site, no dropping of loosened clamping parts
- For mesh widths of 22 to 36 mm and grating heights of 25 to 40 mm (other sizes on request)
- Simple adjustment and tightening of loose clamps
- Clamps are supplied hot-dip galvanised finish

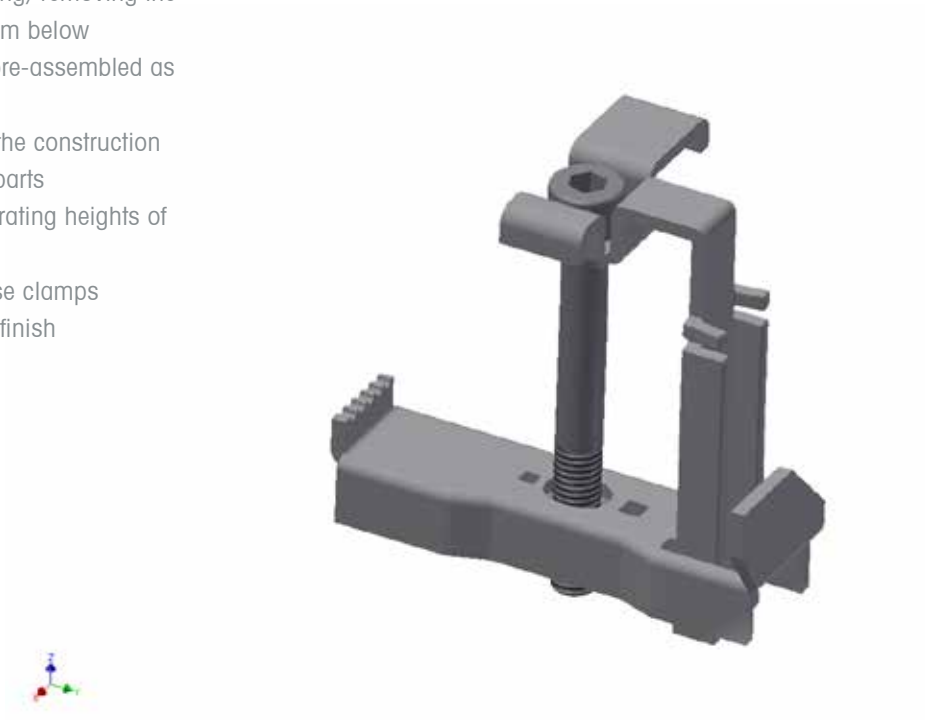


Technical Details:



Hilti-Clamp


galvanized	
Designation	Mesh width [mm]
XMGR	33 x 33

max. grating height 40 mm

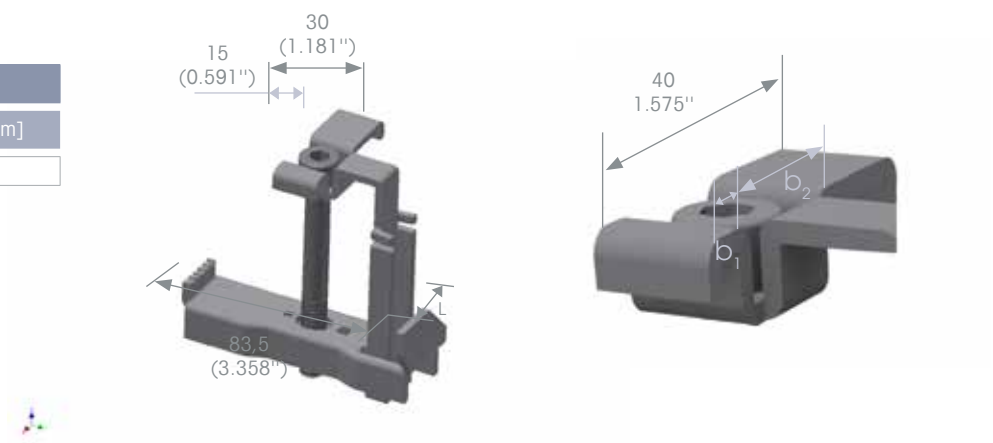

Easy and fast installation:

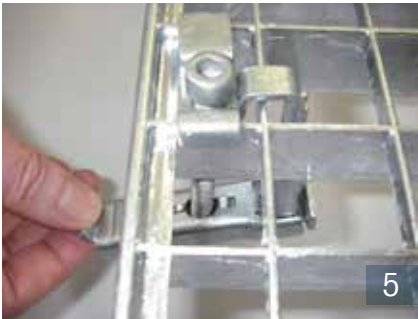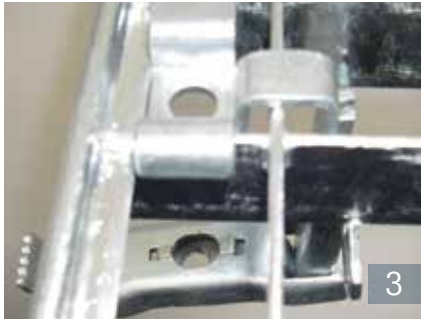

Installation overview	
Installation quantity/hour	240
Suitable grating meshes	<div><p>a (min-max) 22 - 36 mm</p><p>b (min-max) 25 - 40 mm</p><p>c = axis</p></div>
Bearing bar thickness (min-max)	2 - 3 mm
Indoors	••
Outdoors	••
Sea water	-
Vehicle traffic	-
Recommended inst. tool	Electric screwdriver
Torque in Newton Meter (Nm)	5 - 8
Screwdriver setting	4 - 7
Material flange/screw	hot-dip galvanized

- Recommended: ••
- Suitable: •
- Not recommended: -

No liability whatsoever can be accepted for use other than recommended.